

## Generator set data sheet



**Model:** C12 D6 (X-Series)  
**Frequency:** 60 Hz  
**Fuel type:** Diesel

<b>Spec sheet:</b>	SS26-CPGK
<b>Noise data sheet (open/enclosed):</b>	ND60-OS550/ND60-CS550
<b>Airflow data sheet:</b>	AF60-550
<b>Derate data sheet (open/enclosed):</b>	DD60-OS550/DD60-CS550
<b>Transient data sheet:</b>	TD60-550

<b>Fuel consumption</b>	<b>Standby</b>				<b>Prime</b>			
	<b>kVA (kWe)</b>				<b>kVA (kWe)</b>			
Ratings	12 (15)				10.9 (13.6)			
Load	<b>1/4</b>	<b>1/2</b>	<b>3/4</b>	<b>Full</b>	<b>1/4</b>	<b>1/2</b>	<b>3/4</b>	<b>Full</b>
gph	0.6	0.8	1.0	1.2	0.6	0.8	0.9	1.1
L/hr	2.4	3.0	3.7	4.6	2.3	2.9	3.5	4.2

<b>Engine</b>	<b>Standby rating</b>	<b>Prime rating</b>
Engine manufacturer	Cummins	
Engine model	X2.5G4	
Configuration	4 cycle; In-line; 3 cylinder diesel	
Aspiration	Naturally aspirated	
Gross engine power output, kWm	28.7	25.85
BMEP at set rated load, kPa	765.3	689.3
Bore, mm	91.4	
Stroke, mm	127	
Rated speed, rpm	1800	
Piston speed, m/s	7.62	
Compression ratio	18.5:1	
Lube oil capacity, L	7.3	
Overspeed limit, rpm	2070	
Regenerative power, kW	2	
Governor type	Mechanical - Std	
Starting voltage	12 Volts DC	

<b>Fuel flow</b>	
Maximum fuel flow, L/hr	40
Maximum fuel inlet restriction, mm Hg	73.66
Maximum fuel inlet temperature, °C	60

<b>Air</b>	<b>Standby rating</b>	<b>Prime rating</b>
Combustion air, m <sup>3</sup> /min	2.30	2.30
Maximum air cleaner restriction, kPa	4	

<b>Exhaust</b>		
Exhaust gas flow at set rated load, m <sup>3</sup> /min		
Exhaust gas temperature, °C	660	660
Maximum exhaust back pressure, kPa	3.38	

<b>Standard set-mounted radiator cooling</b>		
Ambient design, °C	50	
Fan load, kW <sub>m</sub>	1.9	
Coolant capacity (with radiator), L	15	
Cooling system air flow, m <sup>3</sup> /sec @ 12.7 mm H <sub>2</sub> O	0.9	
Total heat rejection, Btu/min	882	
Maximum cooling air flow static restriction, mm H <sub>2</sub> O		


<b>Weights*</b>	<b>Open</b>	<b>Enclosed</b>
Unit dry weight, kgs	601.5	921.5
Unit wet weight, kgs	623.5	943.5

\* Weights represent a set with standard features. See outline drawing for weights of other configurations.


<b>Dimensions</b>	<b>Length</b>	<b>Width</b>	<b>Height</b>
Standard open set dimensions, mm	1667	930	1282
Enclosed set standard dimensions, mm	2082	987	1524

### Genset outline

#### Open set

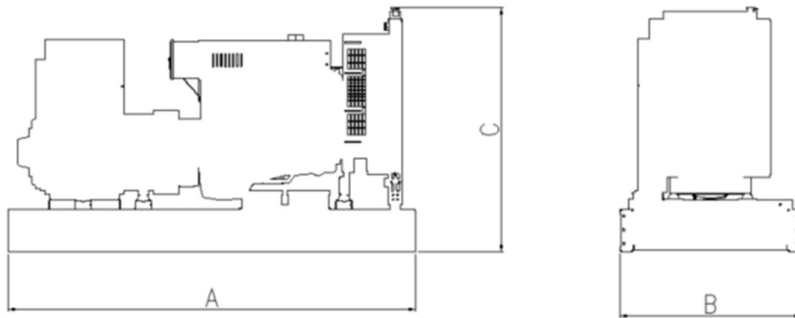

#### Enclosed set

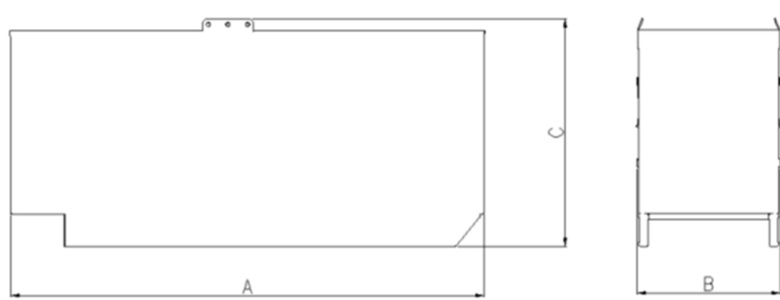

Outlines are for illustrative purposes only. Please refer to the genset outline drawing for an exact representation of this model.

## Alternator data

Connection <sup>1</sup>	Temp rise °C	Duty <sup>2</sup>	Alternator	Voltage
3 phase	150/125	S/P	S0L1-L1	440-480 V
3 phase	125/105	S/P	S0L1-P1	416-480 V
1 phase	125/105	S/P	S0L1-S1	240 V

## Ratings definitions

Emergency Standby Power (ESP):	Limited-Time running Power (LTP):	Prime Power (PRP):	Base load (Continuous) Power (COP):
Applicable for supplying power to varying electrical load for the duration of power interruption of a reliable utility source. Emergency Standby Power (ESP) is in accordance with ISO 8528. Fuel Stop power in accordance with ISO 3046, AS 2789 and DIN 6271.	Applicable for supplying power to a constant electrical load for limited hours. Limited-Time Running Power (LTP) is in accordance with ISO 8528.	Applicable for supplying power to varying electrical load for unlimited hours. Prime Power (PRP) is in accordance with ISO 8528. Ten percent overload capability is available in accordance with ISO 3046, AS 2789 and DIN 6271.	Applicable for supplying power continuously to a constant electrical load for unlimited hours. Continuous Power (COP) is in accordance with ISO 8528, ISO 3046, AS 2789 and DIN 6271.

## Formulas for calculating full load currents:

### Three phase output

$$\frac{\text{kW} \times 1000}{\text{Voltage} \times 1.73 \times 0.8}$$

### Single phase output

$$\frac{\text{kW} \times \text{Single Phase Factor} \times 1000}{\text{Voltage}}$$

For more information contact your local Cummins distributor or visit [power.cummins.com](http://power.cummins.com)

Our energy working for you.™

